



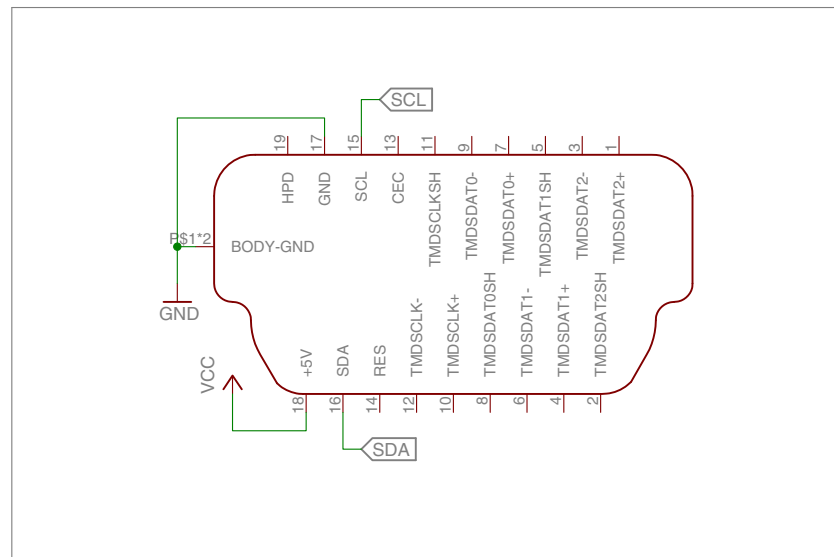

HDMI Connector

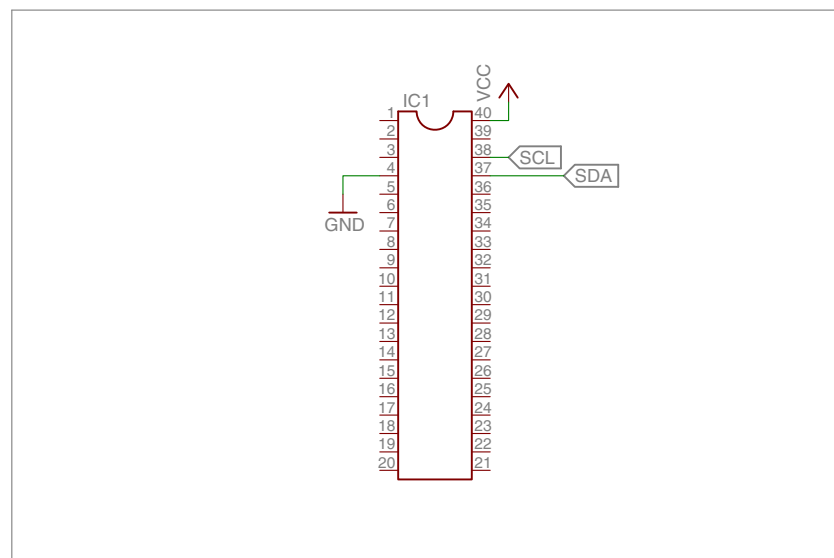

40 Pin DIP Form Factor

Headless Ghost Programming Adaptor
D Joshi
September 2014
Rev. 1
PCB

headlessghost.com

Released under Creative Commons Attribution-ShareAlike 3.0 Unported Licence
(<https://creativecommons.org/licenses/by-sa/3.0/legalcode>)

This adaptor board breaks out the EDID clock, data and power lines from a standard HDMI socket - allowing access to the EEPROM on a Headless Ghost module, or any other HDMI display.

The 40pin DIP form factor fit comfortably in a number of EEPROM programming devices as well as standard prototyping breadboard should you wish to experiment.

The programming adaptor design is provided without any warranty.

The 4 larger through holes on the right are for four optional Harwin P25-5223 sprung pins. These can be used to reprogram a Headless Ghost using the programming pins instead of plugging it in. This is useful if the module is in an enclosure or if the HDMI socket not available.